

MADE IN SPAIN
Design by PRILUX



Applications



Monuments



Fairgrounds



Facades






















Historic buildings



Cultural spaces

Specifications (Series luminaires)










	Voltage (V)	220-240V
	Frecuency (Hz)	50-60Hz
	Current (A)	700mA
	Power factor (Cos fi)	0.98
	LED number	80
	Dimming	No
	IP Tightness index	IP66
	IK Impact resistance	IK10
	Body color	9007
	Diffuser Material	PC-T
	Body	AL iap
	Colour temperature	RGBW(W:4000K)
	CRI Colour rendering index	>80 (Blanco)
	Optical	PEXL0M

	Measures	476x174x479mm
	Surges protection	No
	Flux (lm)	11.108lm
	Electrical isolation	CI
	Lifetime	L90B10>184.000h


Prilux guarantees a ± 10% tolerance in light flux measurements.

Dimensions

References


								
586429	Lira 2X	164 máx.	700mA	13.306lm	11.108lm	80	HERR080-PEXL0M	No

Photometry

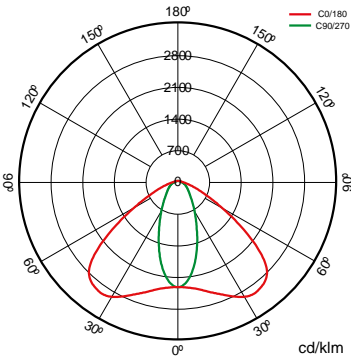

On request





Bluetooth

- 
- AEXLOM
- AINLOM
- PINLOM
- S014LOM
- S025LOM
- S074LOM
- S137LOM
- S154LOM

Accessories



452670

KIT CONEXION
HEXAGON REMOTO
RGBW 3MTS



452687

KIT CONEXION
HEXAGON REMOTO
RGBW 5MTS



471428

KIT CONEXION
HEXAGON REMOTO
RGBW 7MTS



471596

KIT CONEXION
HEXAGON REMOTO
RGBW 10MTS

Solutions

S



Cora Sport

description



CORA SPORTS is the family of devices by Priluxto control DALI light fixtures in new or existing installations, indoors or outdoors, using Bluetooth5.0 wireless technology. Technology that is more efficient and easier to deploy and scale for professional lighting applications. It can work in a meshed arrangement with the light fixtures and to create smart communication networks. Especially recommended in installations with towers and/or groups of light fixtures to make it possible to operate them as a group or individually.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info



You need DALI drive