

# Arisa Top 1 SI

589840

PRILUX 



MADE IN SPAIN  
Design by PRILUX





















---

**Applications**

---




## Specifications (Series luminaires)




 <b>Voltage (V)</b>	220-240V	 <b>Measures</b>	478x478x590mm
<b>Hz Frecuency (Hz)</b>	50-60Hz	 <b>Weight</b>	8Kg
 <b>Current (A)</b>	350mA	 <b>Wind Resistance</b>	0,188m2
$\phi$ <b>Power factor (Cos fi)</b>	0.91	 <b>Operating temperature</b>	-40~+50°C
 <b>LED number</b>	32	$\phi_{LUM}$ <b>Flux (lm)</b>	4.932lm
 <b>Dimming</b>	5N - DALI	 <b>Electrical isolation</b>	CI
 <b>Comm. Prot. for reprogr.</b>	CMR	 <b>Lifetime</b>	L90 B10 >200.000h
 <b>IP Tightness index</b>	IP66	$\phi/W$ <b>Efficacy</b>	144lm/W
 <b>IK Impact resistance</b>	IK09		
 <b>Body color</b>	9007		
 <b>Diffuser Material</b>	VT-T		
 <b>Body</b>	AL iap		
<b>K Colour temperature</b>	4.000K		
 <b>CRI Colour rendering index</b>	>70		
 <b>Optical</b>	ART1032-PPIL0M		

Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.


## Dimensions

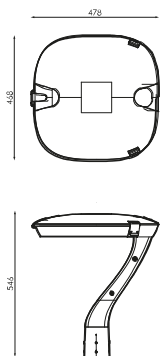


## References

	$W_{LED}$	$W$		$\phi$	$\phi_{LED}$	$\phi_{LUM}$	$\phi/W$		<b>K</b>
<b>589840</b>	32W	34,3W	350mA	6.397lm	5.942lm	4.932lm	144lm/W	32	4.000K

## On request



Class II



Double Level with Line of Command



PC-T (IK10)



PCAmbar

>70 2.700K

>80 3.000K

>80 4.000K

>70 2.700K



Available RAL colors (Consult)



VA0010P

VA00L0M

VA01L0M

VA02L0M

VA03D0P

VA04D0P

VA05I0P



VA06I0P

VA07L0P


VA08L0M

## Light packages



			PCA	722	727	730	827	830	840
W			$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$
<b>34,3W</b>	32	350mA	2.640lm 77lm/W	3.809lm 111lm/W	4.414lm 129lm/W		4.055lm 118lm/W	4.055lm 118lm/W	4.274lm 125lm/W

## Mounting

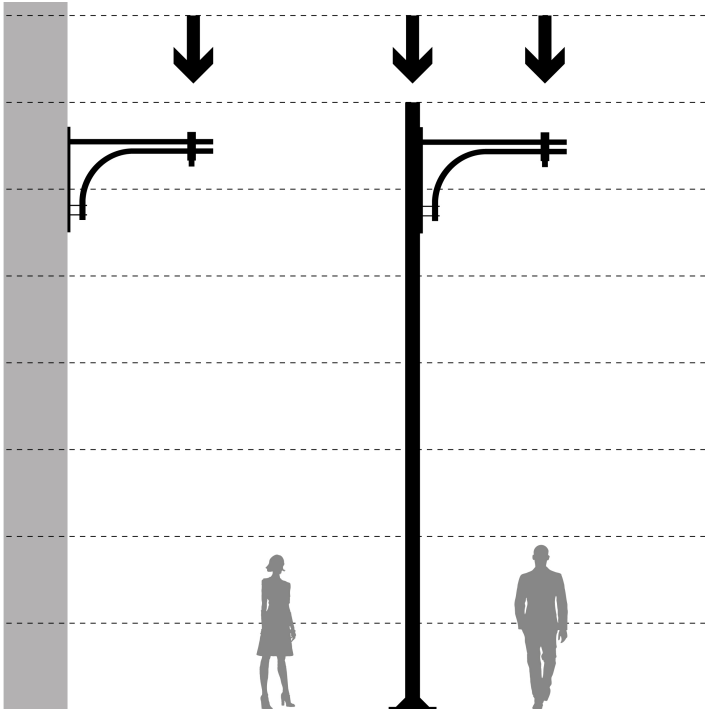

## Technologies



### Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

### SystemShield



SYSTEMSHIELD technology is designed to guarantee the hours of useful life of luminaires installed in environments where exceeding the maximum operating temperature is possible and even probable. Using thermal probes, the luminaire knows its operating temperature at all times.



### CMR



CMR (CORA MANAGER READY) identifies the prilux luminaires compatible with the CORA MANAGER system that provides the luminaires with control, regulation and programming.

## Solutions

S



### Was Outdoor

#### description



WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature, CCT. WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature



### Safelight

#### description



SAFELIGHT allows the lighting of zebra crossings with road luminaires adapted with special optics for this application that illuminate with white light with a continuous level of 100%



### Cora Manager

#### description



One of the key pieces to achieve the path towards smart cities is lighting. Lighting management systems are advancing by leaps and bounds, prioritizing primary objectives such as service quality, cost reduction and care for the environment. CORA Manager is the control system developed by Prilux that, together with our compatible luminaires that provides intelligent management of public lighting, maintaining harmony between sustainable development and quality of life for citizens, while promoting safety and saving.

#### Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)