
























Specifications (Series luminaires)




	Electrical isolation	CII
	Voltage (V)	220-240V
	Frecuency (Hz)	50-60Hz
	Dimming	No
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC
	Body	PC
	Colour temperature	4.000K
	CRI Colour rendering index	>80
	Opening angle	120°
	Measures	115x29,5mm
	Mounting position	Empotrar
	Flux (lm)	587lm
	Lifetime	(L70B50>) 25.000h

References

	W	ϕ_{LUM}	K					
590488	6W	587lm	4.000K	>80	White	100mm	115x29,5mm	No

Dimensions

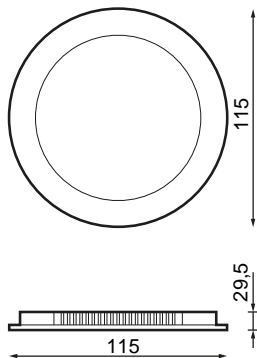

Photometry



Info



PCB Module made in aluminium in order to make easily the dissipation of temperature . Internal polycarbonate board to improve the light reflection. Perimetral light.

Accessories



590563

BRENO BASIC
ACCESSORY 6W
SURFACE 115X32MM
WHITE