


















## Specifications (Series luminaires)


	<b>Electrical isolation</b>	CII
	<b>Voltage (V)</b>	220-240V
	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP20
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PC
	<b>Body</b>	PC
	<b>Colour temperature</b>	6.500K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	120°
	<b>Measures</b>	115x29,5mm
	<b>Mounting position</b>	Empotrar
	<b>Flux (lm)</b>	602lm
	<b>Lifetime</b>	(L70B50>) 25.000h

## References



	W	$\phi_{LUM}$	K					
<b>590495</b>	6W	602lm	6.500K	>80	White	100mm	115x29,5mm	No

## Dimensions

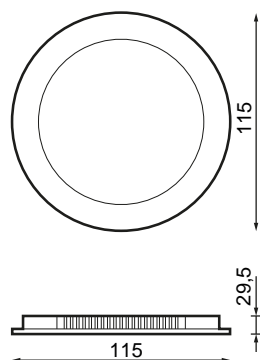

## Photometry



## Info



PCB Module made in aluminium in order to make easily the dissipation of temperature . Internal polycarbonate board to improve the light reflection. Perimetral light.

---

## Accessories

---



---

### 590563

---

BRENO BASIC  
ACCESSORY 6W  
SURFACE 115X32MM  
WHITE