


















Specifications (Series luminaires)


	Electrical isolation	CII
	Voltage (V)	220-240V
	Frecuency (Hz)	50-60Hz
	Dimming	No
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC
	Body	PC
	Colour temperature	6.500K
	CRI Colour rendering index	>80
	Opening angle	120°
	Measures	175x29,5mm
	Mounting position	Empotrar
	Flux (lm)	1.317lm
	Lifetime	(L70B50>) 25.000h

References



	W	ϕ_{LUM}	K					
590525	12W	1.317lm	6.500K	>80	White	150mm	175x29,5mm	No

Dimensions

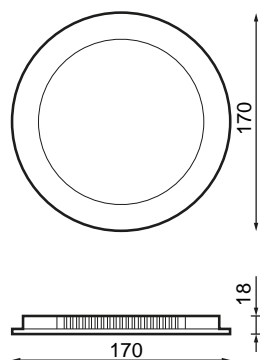

Photometry



Info



PCB Module made in aluminium in order to make easily the dissipation of temperature . Internal polycarbonate board to improve the light reflection. Perimetral light.

Accessories



590570

BRENO BASIC
ACCESSORY 12W
SURFACE 175X32MM
WHITE