
















Specifications (Series luminaires)




	Electrical isolation	CIII
	Voltage (V)	V
	Dimming	No
	IP Tightness index	IP65
	Body	AL
K	Colour temperature	4.000K
	CRI Colour rendering index	>80
	Measures	211,3x313,9x37,4mm
	Flux (lm)	1.114lm
	Lifetime	(L70B50>) 25.000h

References





	W	ϕ_{LUM}	K			
590709	10W	1.114lm	4.000K	>80	(L70B50>)	25.000h 211,3x313,9x37,4mm

Dimensions



Photometry

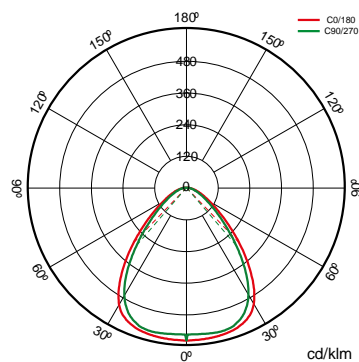

Info	
Replaceable battery	