



Applications



Fairgrounds



Facades


















Historic buildings



Cultural spaces


Specifications (Series luminaires)

| | |
|--|-----------|
|  Voltage (V) | 220-240V |
| Hz Frecuency (Hz) | 50-60HzHz |
|  LED number | 18 |
|  Dimming | No |
|  IP Tightness index | IP66 |
|  IK Impact resistance | IK09 |
|  Body color | 9007 |
|  Diffuser Material | VT |
|  Body | AL |
| K Colour temperature | 3.000K |
|  CRI Colour rendering index | >80 |




| | |
|--|---------------|
|  Measures | 960x102x88mm |
|  Operating temperature | -20°C a +35°C |
|  Surges protection | No |
|  Flux (lm) | 3.319lm |
|  Electrical isolation | CI |
|  Lifetime | L70>50.000h |

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

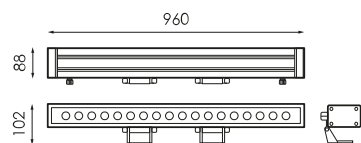Dimensions



References

| | | | | | | |
|---|-----------|-----|--------------|--------------|---|---|
|  | W_{LED} | W | ϕ_{LED} | ϕ_{LUM} |  |  |
| 591812 | 42W | 45W | 3.924lm | 3.319lm | 18 | No |

Photometry

