



















Specifications (Series luminaires)

	Voltage (V)	230V
	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	>0,5
	Dimming	No
	Bushing type	GU10
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC-O
	Colour temperature	4.000K
	CRI Colour rendering index	>80
	Opening angle	38°
	Measures	50x58mm
	Operating temperature	-5°C~+35 °C
	Flux (lm)	600lm
	Lifetime	(L70B50>) 25.000h
	CEE Energy classification	F

References




	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
595322	6,5W	>0,5	600lm	4.000K	50x58mm

Dimensions



Photometry

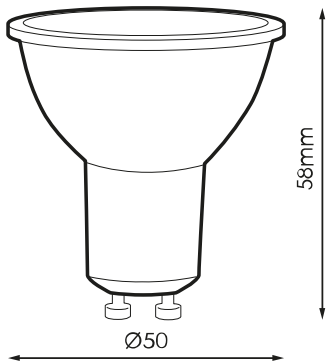

Accessories



974851

GU10/GZ10
LAMPHOLDER WITH
SILICONE CABLE