



Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50/60Hz
Φ	Power factor (Cos fi)	$\geq 0,9$
	Dimming	No

	IP Tightness index	IP65
	Body color	White
	Diffuser Material	PMMA-O
	Body	FE

K	Colour temperature	4000K
	CRI Colour rendering index	>80
	Opening angle	90°

	Measures	0x0x0mm
	Mounting position	Empotrado Techo

	Operating temperature	-25°C ~ +45°C
---	-----------------------	---------------

Φ_{LUM}	Flux (lm)	4,315lm
--------------	-----------	---------


	Electrical isolation	CII
---	----------------------	-----

	Lifetime	50.000h
---	----------	---------

References

	W_{LED}	W		ϕ	ϕ_{LED}	ϕ_{LUM}	K		
628761	36W	40W	1000mA	$\geq 0,9$	5600lm	4315lm	4000K	275 x 1175	No

Dimensions

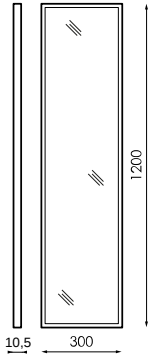

Photometry

