




Specifications (Series luminaires)			☰
⚡	Voltage (V)	220-240V	
Hz	Frecuency (Hz)	50/60Hz	
Φ	Power factor (Cos fi)	≥0,9	
⦿	Dimming	DALI	
IP	IP Tightness index	IP65	
⦿	Body color	White	
▨	Diffuser Material	PMMA-O	
⦿	Body	FE	
K	Colour temperature	4000K	
🌿	CRI Colour rendering index	>80	
△	Opening angle	90°	
↕	Measures	0x0x0mm	
←	Mounting position	Empotrado Techo	
🌡	Operating temperature	-25°C ~ +45°C	
Φ _{LUM}	Flux (lm)	4,315lm	
⦿	Electrical isolation	CII	
⌛	Lifetime	50.000h	

References

	W_{LED}	W		ϕ	ϕ_{LED}	ϕ_{LUM}	K		
629058	36W	40W	1000mA	$\geq 0,9$	5600lm	4315lm	4000K	275 x 1175	Yes

Dimensions

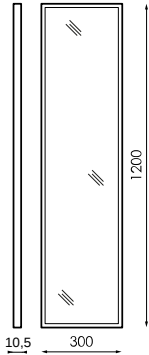

Photometry

