


MADE IN SPAIN
Design by PRILUX



Applications

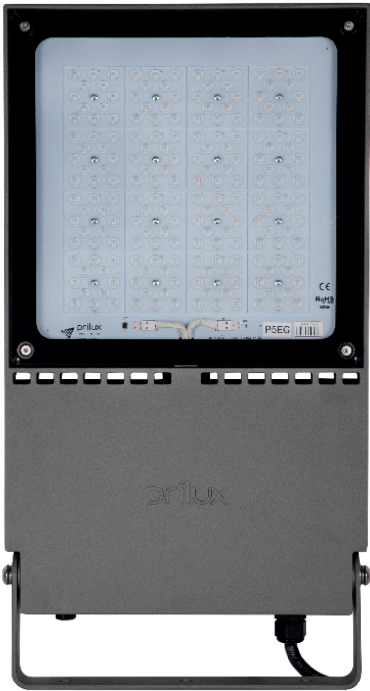


Facades



Industrial




Car parks



Sports grounds



Monuments



Industrial Zones

Certifications



Specifications (Series luminaires)

	Voltage (V)	220-240V
	Frecuency (Hz)	50-60Hz
	Current (A)	350mA
	Power factor (Cos fi)	0.93
	LED number	108
	Dimming	DALI
	IP Tightness index	IP66
	IK Impact resistance	IK09
	Body color	9007
	Body	AL iap
	Colour temperature	3000K
	CRI Colour rendering index	70cromatica
	Optical	VA1112P

	Measures	500x250x55mm
	Wind Resistance	0,11m2
	Operating temperature	50°C
	Surges protection	No
	Flux (lm)	5763lm
	Electrical isolation	CCI
	Lifetime	L70B10>100.000h
	Lifetime	L70B10> 100.000h

Prilux guarantees a ± 10% tolerance in light flux measurements.

Dimensions

References

										
643061	35W	38W	350mA	7593lm	7484lm	5763lm	152lm/W	108	VA1112P	Yes

Light packages

			PCA	722	727	730	827	830	840
W			ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W
38W	108	350mA					4.695lm 124lm/W	4.909lm 129lm/W	5.335lm 140lm/W

Accessories



515788

ACCESSORY
PARALUMEN
NANTES RAL9005T

Solutions

S



Cora
Manager

description

Lighting management in the electrical panel that allows group control of the luminaires connected to the control center via the power line (CMR) without additional wiring

Info 

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es