




Applications



Home

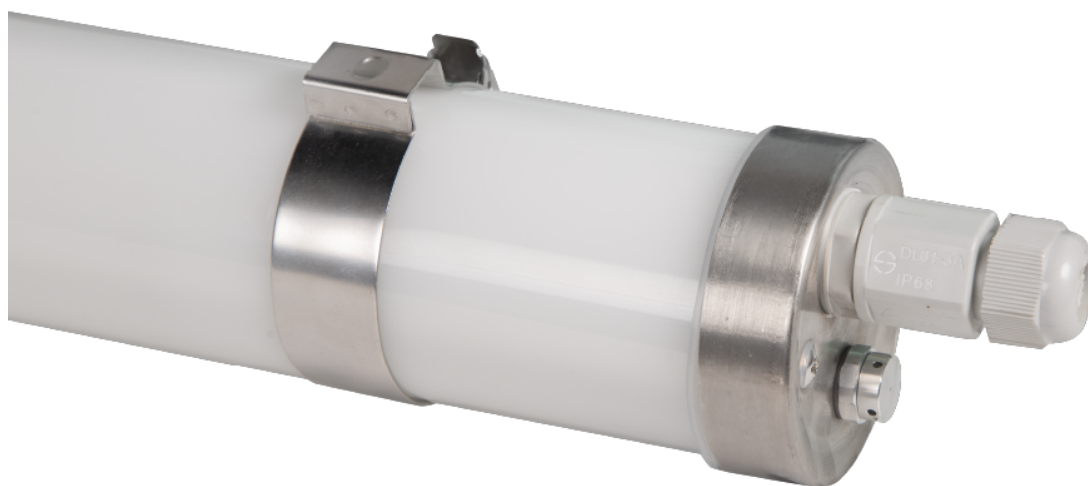


Hotels




Restaurants



Retail



Offices



Classrooms



Retrofit

Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50/60Hz
ϕ	Power factor (Cos fi)	>0,9
	Dimming	No

	IP Tightness index	IP69
	IK Impact resistance	IK10
	Body color	Acero
	Diffuser Material	PC-O
	Body	AL

K	Colour temperature	4000K
	CRI Colour rendering index	80

	Measures	124,9x7,5x7,5mm
	Weight	1.626Kg

	Operating temperature	40°C
---	------------------------------	------


	Flux (lm)	5,760lm
---	------------------	---------

	Electrical isolation	CI
---	-----------------------------	----

	Lifetime	L70B50>100000h
---	-----------------	----------------

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions



References

	W				K		
653206	36W	7000lm	5760lm	130°	4000K	80cromatica	124,9x7,5x7,5mm