




Specifications (Series luminaires)

	Electrical isolation	CII
	Voltage (V)	V
Hz	Frecuency (Hz)	50/60Hz
	Power factor (Cos fi)	>0,5
	Dimming	No

	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC
	Body	PC

K	Colour temperature	3000K-4000K-6500K
	CRI Colour rendering index	>80
	Opening angle	120°

	Measures	330x330x53mm
	Mounting position	Surface
	Inclination	-


	Operating temperature	-20°C ~ +45°C
---	------------------------------	---------------

	Flux (lm)	2,203, 2,226, 2,253lm
---	------------------	-----------------------

	Lifetime	(L70B50>)25.000h
---	-----------------	------------------

References							
	W	ϕ_{LUM}	K				
684194	20W	2203, 2226, 2253lm	3000K	>80	White	330x330x53mm	No
			4000K				
			6500K				

Dimensions

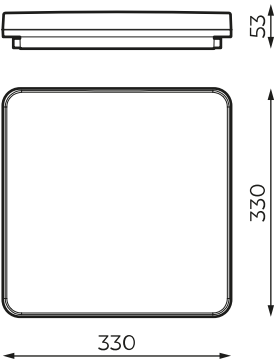

Photometry

