



## Specifications (Series luminaires)

|   |                                   |                       |
|---|-----------------------------------|-----------------------|
|    | <b>Electrical isolation</b>       | CI                    |
|    | <b>Voltage (V)</b>                | 220-240V              |
| <b>Hz</b>   | <b>Frecuency (Hz)</b>             | 50-60Hz               |
|    | <b>Power factor (Cos fi)</b>      | >0,9                  |
|    | <b>Dimming</b>                    | No                    |
|    | <b>IP Tightness index</b>         | IP66                  |
|    | <b>Body color</b>                 | Grey                  |
|    | <b>Diffuser Material</b>          | PC-O                  |
| <b>K</b>  | <b>Colour temperature</b>         | 3000K-4000K-6500K     |
|   | <b>CRI Colour rendering index</b> | >80                   |
|  | <b>Opening angle</b>              | 120°                  |
|  | <b>Measures</b>                   | 550x71x80mm           |
|  | <b>Mounting position</b>          | Superficie/Suspendido |
|  | <b>Operating temperature</b>      | -10°C ~ +35°C         |
|  | <b>Flux (lm)</b>                  | max. 2580lm           |
|  | <b>Lifetime</b>                   | (L70B50>)50.000h      |

## References




|  | W   | $\phi$ | $\phi_{LED}$ | $\phi_{LUM}$ | K     |  |
|---|-----|--------|--------------|--------------|-------|---|
| <b>684279</b>   | 18W | >0,9   | 2750lm       | 2500lm       | 3000K | No  |
|   |     |        | 2805lm       | 2550lm       | 4000K |   |
|   |     |        | 2852lm       | 2580lm       | 6500K |   |

## Dimensions



## Photometry

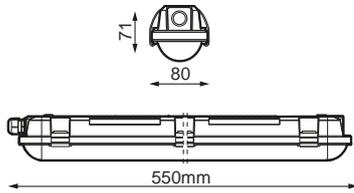



## On request



Dali



Emergency kit

## Accessories



**686136**

KIT SUSPENSIÓN  
PANTALLA AMBORA  
(1 KIT X PANTALLA)



**686143**

PASACABLE IP65  
BANDEJA TRASERA  
PANTALLA AMBORA



**686587**

DIFUSOR PC  
AMBORA SWITCH  
600MM