



Applications



Home




Hotels




Restaurants




Retail



Offices



Classrooms



Halls



Health care


Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
ϕ	Power factor (Cos fi)	>0,9
	Dimming	No
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC
K	Colour temperature	3000K-4000K-5700K
	CRI Colour rendering index	>80

	Measures	174x174x87mm
	Cut dimensions	Ø145-155
	Mounting position	Empotrado Techo
	Operating temperature	-20°C ~ +40°C
	Flux (lm)	1,903, 1,923, 1,936lm
	Electrical isolation	CII
	Lifetime	L70>60.000h

Prilux guarantees a ± 10% tolerance in light flux measurements.


Dimensions



References

	W	ϕ_{LUM}	Δ	K		
684484	20W	1903, 1923, 1936lm	60°	3000K 4000K 5700K	174x174x87mm	>80

Photometry

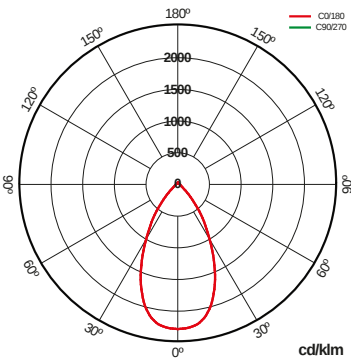

On request





Dali



Bluetooth

Accessories



684644

ARO DECORATIVO
NEGRO SEKOA
SWITCH 20W 174MM



684675

ACCESORIO
SUPERFICIE BLANCO
SEKOA SWITCH 20W



684699

ACCESORIO
SUPERFICIE NEGRO
SEKOA SWITCH 20W