



## Specifications (Series luminaires)


	<b>Electrical isolation</b>	CI
	<b>Voltage (V)</b>	220-240V
<b>Hz</b>	<b>Frecuency (Hz)</b>	50-60Hz
$\phi$	<b>Power factor (Cos fi)</b>	>0,9
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP66
	<b>Diffuser Material</b>	PC-O
<b>K</b>	<b>Colour temperature</b>	3000K-4000K-6500K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	120°
	<b>Measures</b>	0x0x0mm
	<b>Operating temperature</b>	-10°C ~ +35°C
$\phi_{LUM}$	<b>Flux (lm)</b>	max. 5080lm
	<b>Lifetime</b>	(L70B50>)50.000h

## References



	W	$\phi$	$\phi_{LED}$	$\phi_{LUM}$	K	
<b>690980</b>	36W	>0,9	5500lm	5000lm	3000K	No
			5605lm	5050lm	4000K	
			5625lm	5080lm	6500K	

## Dimensions

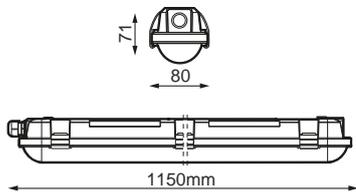

## Photometry



## On request



Emergency kit 3h (mod. 1x/2x  
1.200mm/1.500mm)



Dali



Presence and brightness sensor (mod.  
1x/2x 1.200mm/1.500mm)

## Accessories



**684415**

JUEGO 10 CLIPS  
INOX IK10 AMBORA  
1200MM



**686136**

KIT SUSPENSIÓN  
PANTALLA AMBORA  
(1 KIT X PANTALLA)



**686143**

PASACABLE IP65  
BANDEJA TRASERA  
PANTALLA AMBORA



**686594**

DIFUSOR PC  
AMBORA SWITCH  
1200MM