



## Specifications (Series luminaires)


	<b>Electrical isolation</b>	CI
	<b>Voltage (V)</b>	220-240V
<b>Hz</b>	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Power factor (Cos fi)</b>	>0,9
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP66
	<b>Body color</b>	Grey
	<b>Diffuser Material</b>	PC-O
<b>K</b>	<b>Colour temperature</b>	3000K-4000K-6500K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	120°
	<b>Measures</b>	1.460x80x90mm
	<b>Mounting position</b>	Superficie/Suspendido
	<b>Operating temperature</b>	-10°C ~ +35°C
	<b>Flux (lm)</b>	max. 7080lm
	<b>Lifetime</b>	(L70B50>)50.000h

## References



	W	$\phi$	$\phi_{LED}$	$\phi_{LUM}$	K	
<b>690997</b>	50W	>0,9	7800lm	7000lm	3000K	No
			7855lm	7050lm	4000K	
			7885lm	7080lm	6500K	

## Dimensions

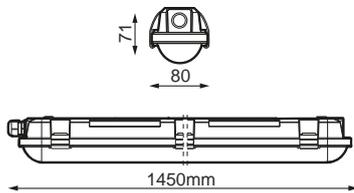

## Photometry



## On request



Dali



Emergency kit

## Accessories



**684422**

JUEGO 12 CLIPS INOX  
IK10 AMBORA  
1500MM



**686136**

KIT SUSPENSIÓN  
PANTALLA AMBORA  
(1 KIT X PANTALLA)



**686143**

PASACABLE IP65  
BANDEJA TRASERA  
PANTALLA AMBORA



**686600**

DIFUSOR PC  
AMBORA SWITCH  
1500MM