




Applications



Historic buildings



Cultural spaces











Facades










Fairgrounds

Specifications (Series luminaires)




	Voltage (V)	24 dcV
	Dimming	No
	IP Tightness index	IP66
	IK Impact resistance	IK06
	Body color	9004
	Diffuser Material	VT
	Body	AL
K	Colour temperature	3000K
	CRI Colour rendering index	>80

	Measures	100x100x108mm
	Weight	0.001055Kg
	Operating temperature	-30°C ~ +50°C
	Surges protection	No
	Flux (lm)	1,925lm
	Electrical isolation	CIII
	Lifetime	(L70B50>)50.000h




Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions




References



	W		
693844	24W	1925lm	No

Photometry

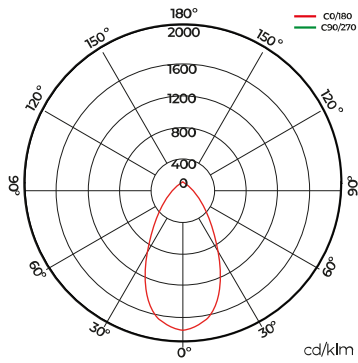

Accessories



481687

POWER SUPPLY
150W 24V IP66 PLUG/
IP44



488457

FUENTE DE
ALIMENTACION 60W
24V IP66 CONECTOR



488464

POWER SUPPLY
100W 24V IP66 PLUG/
IP44



571968

FUENTE DE
ALIMENTACION
200W 24V IP67



662932

ADAPT. 15CM NEGRO
CONEC.SMART LINK
A HEMBRA RÁPIDO




705028

CONECTOR WC
AUTOBLOCANTE
MACHO/HEMBRA 2P



698221

ACCESORIO
"PINCHO"
PROYECTOR ARTIUM



715249

MG-XTREM H07 RN-F
2X1 450/750V CORTE
1 METRO