




Applications



Historic buildings



Cultural spaces


















Facades




Fairgrounds

Specifications (Series luminaires)

 Voltage (V)	24 dcV	 Measures	100x100x108mm
 Dimming	DMX	 Weight	0.001056Kg
 IP Tightness index	IP66	 Operating temperature	-30°C ~ +50°C
 IK Impact resistance	IK06	 Surges protection	No
 Body color	9004	 Flux (lm)	965lm
 Diffuser Material	VT	 Electrical isolation	CIII
 Body	AL	 Lifetime	(L70B50>)50.000h
K Colour temperature	RGBW(W:3000)		
 CRI Colour rendering index	>RGBW(W:3000)		

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions



References

	W		
693851	24W	965lm	Yes

Photometry

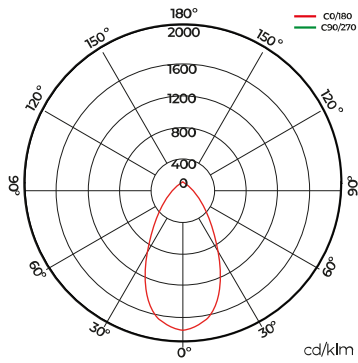

Accessories



485135

MASTER DMX 512 1
UNIVERSE



481687

POWER SUPPLY
150W 24V IP66 PLUG/
IP44




488457

FUENTE DE
ALIMENTACION 60W
24V IP66 CONECTOR



488464

POWER SUPPLY
100W 24V IP66 PLUG/
IP44



529037

MASTER DMX 512 2
UNIVERSOS



571968

FUENTE DE
ALIMENTACION
200W 24V IP67



662932

ADAPT. 15CM NEGRO
CONEC.SMART LINK
A HEMBRA RÁPIDO



701600

BLOQUE CONEXION
T 5P CON
ADAPTADOR



705028

CONECTOR WC
AUTOBLOCANTE
MACHO/HEMBRA 2P




705042

CONECTOR WC
AUTOBLOCANTE
MACHO/HEMBRA 5P




698221

ACCESORIO
"PINCHO"
PROYECTOR ARTIUM



708739

MG 60245 IEC57
(YZW) 2X1+3X0,3
CORTE 1 METRO



715249

MG-XTREM H07 RN-F
2X1 450/750V CORTE
1 METRO