



## Specifications (Series luminaires)

|                                                                                   |                              |         |
|-----------------------------------------------------------------------------------|------------------------------|---------|
|  | <b>Voltage (V)</b>           | V       |
| <b>Hz</b>                                                                         | <b>Frecuency (Hz)</b>        | 50/60Hz |
|  | <b>Current (A)</b>           | 1.000mA |
| $\phi$                                                                            | <b>Power factor (Cos fi)</b> | 0.97    |
|  | <b>LED number</b>            | 72      |
|  | <b>Dimming</b>               | No      |

|                                                                                    |                             |          |
|------------------------------------------------------------------------------------|-----------------------------|----------|
|   | <b>IP Tightness index</b>   | IP66     |
|   | <b>IK Impact resistance</b> | IK10     |
|   | <b>Body color</b>           | 9007T    |
|   | <b>Diffuser Material</b>    | VT-T 6mm |
|  | <b>Body</b>                 | AL IAP   |

|                                                                                     |                                   |           |
|-------------------------------------------------------------------------------------|-----------------------------------|-----------|
| <b>K</b>                                                                            | <b>Colour temperature</b>         | 3000K     |
|  | <b>CRI Colour rendering index</b> | >70       |
|  | <b>Optical</b>                    | VA159X75P |
|  | <b>Higher Hemispheric Flow</b>    | max. 0lm  |

|                                                                                     |                        |               |
|-------------------------------------------------------------------------------------|------------------------|---------------|
|  | <b>Measures</b>        | 540x230x112mm |
|  | <b>Weight</b>          | 0.004Kg       |
|  | <b>Wind Resistance</b> | 0,124m2       |

|                                                                                     |                              |               |
|-------------------------------------------------------------------------------------|------------------------------|---------------|
|  | <b>Operating temperature</b> | -40°C ~ +50°C |
|-------------------------------------------------------------------------------------|------------------------------|---------------|

|              |                  |         |
|--------------|------------------|---------|
| $\phi_{LUM}$ | <b>Flux (lm)</b> | 7,333lm |
|--------------|------------------|---------|


|                                                                                     |                             |    |
|-------------------------------------------------------------------------------------|-----------------------------|----|
|  | <b>Electrical isolation</b> | CI |
|-------------------------------------------------------------------------------------|-----------------------------|----|

|                                                                                     |                 |                 |
|-------------------------------------------------------------------------------------|-----------------|-----------------|
|  | <b>Lifetime</b> | L70B10>100.000h |
|-------------------------------------------------------------------------------------|-----------------|-----------------|


|          |                 |         |
|----------|-----------------|---------|
| $\phi/W$ | <b>Efficacy</b> | 136lm/W |
|----------|-----------------|---------|


| References                                                                        |           |     |                                                                                   |        |              |              |          |                                                                                     |       |  |
|-----------------------------------------------------------------------------------|-----------|-----|-----------------------------------------------------------------------------------|--------|--------------|--------------|----------|-------------------------------------------------------------------------------------|-------|-------------------------------------------------------------------------------------|
|  | $W_{LED}$ | W   |  | $\phi$ | $\phi_{LED}$ | $\phi_{LUM}$ | $\phi/W$ |  | K     |                                                                                     |
| 709729                                                                            | 48W       | 54W | 1000mA                                                                            | -1m    | -1m          | 7333lm       | 136lm/W  | 72                                                                                  | 3000K |                                                                                     |

Dimensions 

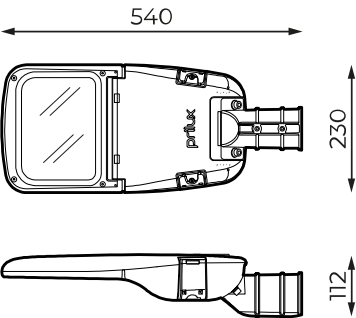

Photometry 





**586566**

ADAP KIT. A POST  
Ø33MM VERSA-  
ARISA ROAD



**496636**

KIT ADAP. A POSTE  
Ø42MM VERSA-  
ARISA PRO ROAD



**496629**

KIT ADAP. A POSTE  
Ø50MM VERSA-  
ARISA PRO ROAD



**501743**

ADAP KIT. TO POST  
Ø76MM VERSATILE  
TECH. RAL9007T