



Specifications (Series luminaires)

	Electrical isolation	CI
	Voltage (V)	120-240V acV
Hz	Frecuency (Hz)	50/60Hz
	Power factor (Cos fi)	Hasta $\geq 0,9$
	Dimming	No

	IP Tightness index	IP65
	IK Impact resistance	IK08
	Body color	9007
	Diffuser Material	VT-T
	Body	AL

K	Colour temperature	RGB-RGB
	CRI Colour rendering index	>RGB
	Optical	PC S-060
	Opening angle	60°

	Measures	285x200x53mm
	Mounting position	MONTAJE EN LIRA
	Inclination	-180°/+180°


	Operating temperature	-20°C ~ +40°C
---	------------------------------	---------------

	Lifetime	(L70B50>)20.000h
---	-----------------	------------------


References


	W	K		
668576	50W	RGB	Aluminio 9007	285x200x53mm
668590	100W	RGB	Aluminio 9007	285x277x53mm

Dimensions

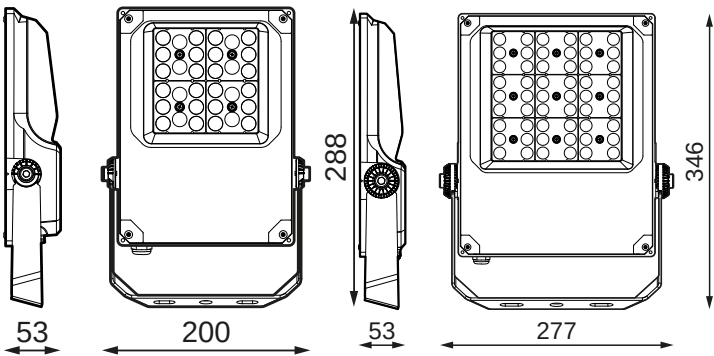

Photometry

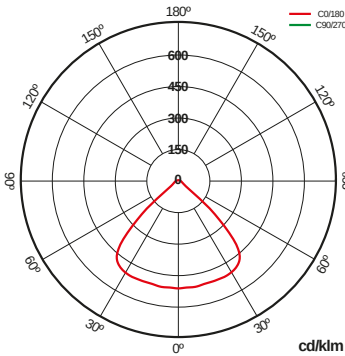



657020

MANDO A
DISTANCIA AKAGY
RGB RF.