




















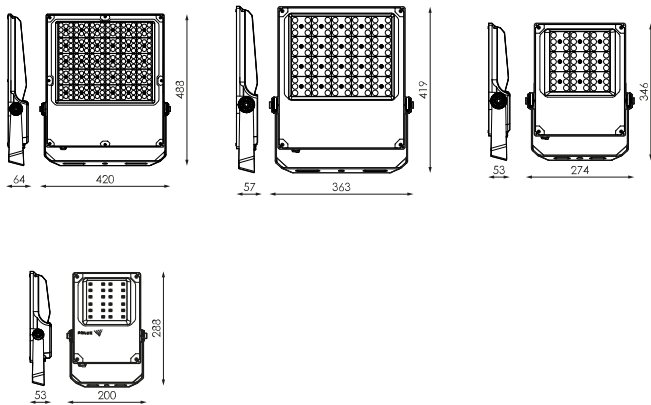
## Specifications (Series luminaires)

	<b>Electrical isolation</b>	CCI
	<b>Voltage (V)</b>	100-240V
<b>Hz</b>	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Power factor (Cos fi)</b>	Hasta $\geq 0,9$
	<b>IP Tightness index</b>	IP65
	<b>IK Impact resistance</b>	IK08
	<b>Body color</b>	RAL9007
	<b>Diffuser Material</b>	VT-T
	<b>Body</b>	AL
<b>K</b>	<b>Colour temperature</b>	3000K/4000K/5000K-3000K/4000K/5000K
	<b>CRI Colour rendering index</b>	70cromatica
	<b>Opening angle</b>	90°
	<b>Measures</b>	420x488x57mm
	<b>Mounting position</b>	Superficie
	<b>Flux (lm)</b>	22.300~45.000lm
	<b>Lifetime</b>	(L70B50>)50.000h

## References

	W	$\phi_{LUM}$	K		
<b>638937</b>	20/30/50W	2.800~7.500lm	3000K/4000K/5000K	Aluminio 9007	200x288x53mm
<b>638944</b>	50/80/100W	7.300~15.000lm	3000K/4000K/5000K	Aluminio 9007	274x346x53mm
<b>638951</b>	100/150/200W	14.800~30.000lm	3000K/4000K/5000K	Aluminio 9007	363x419x56mm
<b>638968</b>	150/200/300W	22.300~45.000lm	3000K/4000K/5000K	Aluminio 9007	420x488x57mm

## Dimensions



## Photometry