

















Specifications (Series luminaires)

	Electrical isolation	CCI
	Voltage (V)	100-240V
Hz	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	Hasta 0,9
	Dimming	No
	IP Tightness index	IP65
	IK Impact resistance	IK10
	Body color	RAL9005
	Diffuser Material	PC
	Body	AL
K	Colour temperature	4000K-5000K
	CRI Colour rendering index	>80
	Measures	Ø320x165mm
	Operating temperature	50°C
	Flux (lm)	33000lm
	Lifetime	L70>50000h




References



	W		ϕ_{LUM}	Δ	K		
629720	100W	600mA	16500lm	90°	5000K	>80	Ø240x165mm
629737	100W	600mA	33000lm	90°	4000K	>80	Ø240x165mm
629744	150W	750mA	33000lm	90°	5000K	>80	Ø280x165mm
629751	150W	750mA	33000lm	90°	4000K	>80	Ø280x165mm
629768	200W	1000mA	33000lm	90°	5000K	>80	Ø320x165mm
629775	200W	1000mA	33000lm	90°	4000K	>80	Ø320x165mm

Dimensions

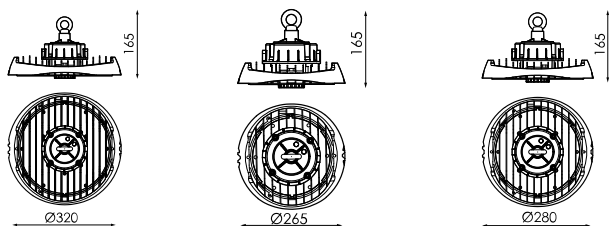

Photometry





Accessories



629836

REFLECTOR AKORA
ALUMINIO 200W 90°



629904

REJILLA
PROTECTORA
AKORA 200W



629935

LIRA AKORA 200W
264X130X52MM



Solutions

S



Cora Industry

description



The CORA device in its three versions; INDUSTRY UNIT, INDUSTRY and CORA INDUSTRY MASTER controls the lighting of new or even existing installations thanks to wireless technology such as BLUETOOTH 5.0



BLUETOOTH Pack

description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es