















Wiht t<sup>3</sup> color selector though switch



Power selector via switch



## Specifications

		Warranty	Up to 5 years of warranty
	Voltaje (V)	100-240V ac	
Hz	Frequency (Hz)	50-60Hz	
	Current (mA)	Up to 1.000mA	
$\Phi$	Power factor	0,9	
	Electrical insulation	CI	
	Ingress protection rating	IP65	
	Impact resistance	IK10	
	Operating temperature	-30°C~+50 °C	
	Beam angle	90°	
	Cycles ON/OFF	35.000	
$\phi$	Luminous flux (lm)	Up to 33.000lm	
<b>K</b>	Colour temperature	4.000-5.000K	
	Ingress protection rating	>80	
	Lifetime	L70>50.000h	
	Dimmable	1-10V	
	Colour	Black	
	Diffuser	PC-Polycarbonate	
	Housing	AL: Aluminium	


Model	Measurements	Weight
60-80-100W	Ø240 x 165mm	1,96kg
80-120-150W	Ø280 x 165mm	2,30kg
100-150-200W	Ø320 x 165mm	2,86kg




## References

	W <sub>LED</sub>	W <sub>T</sub>		Φ <sub>LED</sub>	Φ <sub>T</sub>		K	
629690	54W	60W	400mA	8.652lm	8.400lm	<b>4</b>	<b>5</b>	4.000-5.000K
	72W	80W	500mA	11.536lm	11.200lm	<b>4</b>	<b>5</b>	4.000-5.000K
	92W	100W	600mA	14.120lm	14.000lm	<b>4</b>	<b>5</b>	4.000-5.000K
629706	72W	80W	520mA	11.536lm	11.200lm	<b>4</b>	<b>5</b>	4.000-5.000K
	111W	120W	600mA	17.304lm	16.800lm	<b>4</b>	<b>5</b>	4.000-5.000K
	138W	150W	750mA	21.630lm	21.000lm	<b>4</b>	<b>5</b>	4.000-5.000K
629713	92W	100W	700mA	14.120lm	14.000lm	<b>4</b>	<b>5</b>	4.000-5.000K
	138W	150W	850mA	21.230lm	21.000lm	<b>4</b>	<b>5</b>	4.000-5.000K
	186W	200W	1.000mA	28.840lm	28.000lm	<b>4</b>	<b>5</b>	4.000-5.000K


## Measurements

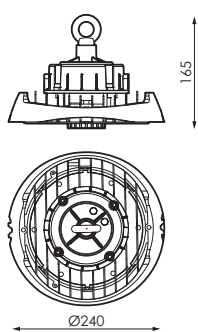

100W

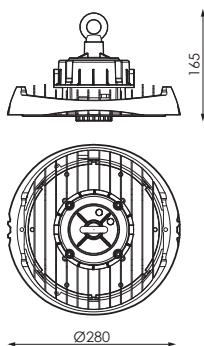


150W

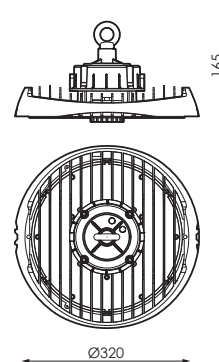

200W

## Photometry

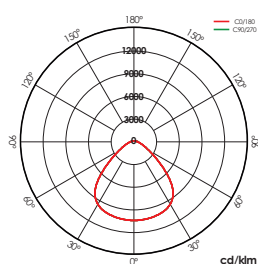

150W 90°

## Accessories



629911 Bracket kit 100W



629881 Security grid 100W



629782 AL reflector 100W60°

629928 Bracket kit 150W

629898 Security grid 150W

629812 AL reflector 100W 90°

629935 Bracket kit 200W

629904 Security grid 200W

629799 AL reflector 150W 60°

629836 AL reflector 200W 90°



501521

Movement detector.  
Valid for high altitudes (up to 15m)  
2/3 levels 1-10V.



507578

Remote control for high-rise motion detector.

## Information

The mounting of the reflector leads to a flow reduction of 4%. This product is supplied with 2 x 250mm built-in hoses.