



Specifications (Series luminaires)

	Electrical isolation	CI
	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	Hasta >0,9
	Dimming	No
	IP Tightness index	IP66
	Body color	Grey
	Diffuser Material	PC-O
K	Colour temperature	3000K-4000K-6500K
	CRI Colour rendering index	>80
	Opening angle	120°
	Measures	1.150x71x80mm
	Mounting position	Superficie/Suspendido
	Operating temperature	-10°C ~ +35°C
	Flux (lm)	max. 7080lm
	Lifetime	(L70B50>)50.000h




References



	W	ϕ	ϕ_{LED}	ϕ_{LUM}	K		
684279	18W	>0,9	2750lm	2500lm	3000K	No	
			2805lm	2550lm	4000K		
			2852lm	2580lm	6500K		
690973	18W	>0,9	2750lm	2500lm	3000K	No	
			2805lm	2550lm	4000K		
			2852lm	2580lm	6500K		
684286	36W	>0,9	5500lm	5000lm	3000K	No	
			5605lm	5050lm	4000K		
			5625lm	5080lm	6500K		
690980	36W	>0,9	5500-5605-5625lm		5000-5050-5080lm	3000K-4000K-6500K	No
684293	50W		7800lm	7000lm	3000K		
			7855lm	7050lm	4000K		
690997	50W	>0,9	7885lm	7080lm	6500K	No	
			7800lm	7000lm	3000K		
			7855lm	7050lm	4000K		
			7885lm	7080lm	6500K		

Dimensions

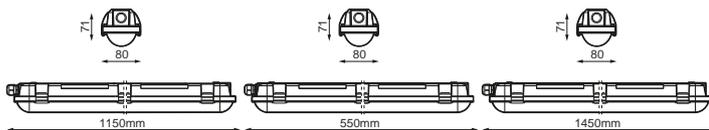

Photometry



On request



Dali



Emergency kit

Accessories



684415

JUEGO 10 CLIPS
INOX IK10 AMBORA
1200MM



686136

KIT SUSPENSIÓN
PANTALLA AMBORA
(1 KIT X PANTALLA)



686143

PASACABLE IP65
BANDEJA TRASERA
PANTALLA AMBORA



686594

DIFUSOR PC
AMBORA SWITCH
1200MM



686587

DIFUSOR PC
AMBORA SWITCH
600MM



684422

JUEGO 12 CLIPS INOX
IK10 AMBORA
1500MM



686600

DIFUSOR PC
AMBORA SWITCH
1500MM