


















Specifications (Series luminaires)

	Electrical isolation	CII
	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Dimming	No
	IP Tightness index	IP65
	IK Impact resistance	IK08
	Body color	Black
	Diffuser Material	PC-O
	Body	PC
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	>80
	Opening angle	124°
	Measures	Ø221x72mm
	Mounting position	Superficie
	Operating temperature	-10°C~+35 °C
	Flux (lm)	2.160lm
	Lifetime	(L70B50>) 25.000h




References



	W	ϕ_{LUM}	K					
378024	20W	2.160lm	4.000K	White	>80	(L70B50>)	124°	Ø221x72mm
378031	20W	2.160lm	4.000K	Black	>80	(L70B50>)	124°	Ø221x72mm
586092	20W	1.927lm	3.000K	White	>80	(L70B50>)	124°	Ø221x72mm
586108	20W	1.927lm	3.000K	Black	>80	(L70B50>)	124°	Ø221x72mm
590099	20W	2.160lm	4.000K	White	>80	(L70B50>)	124°	Ø221x72mm

Dimensions

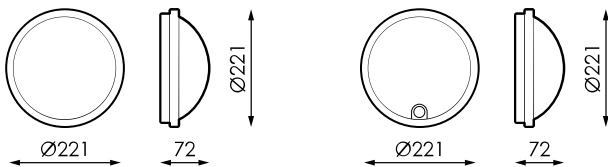

Photometry

