























## Specifications (Series luminaires)


	<b>Electrical isolation</b>	CI
	<b>Voltage (V)</b>	100-240V
<b>Hz</b>	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Power factor (Cos fi)</b>	Hasta $\geq 0,9$
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP67
	<b>IK Impact resistance</b>	IK08
	<b>Body color</b>	Inox
	<b>Body</b>	PVC
	<b>Frame</b>	FE INOX
<b>K</b>	<b>Colour temperature</b>	4.000K/4.000K
	<b>CRI Colour rendering index</b>	>70
	<b>Measures</b>	$\varnothing 180 \times 122 \text{mm}$
	<b>Static load</b>	2.000kg
	<b>Mounting position</b>	Empotrado Suelo
	<b>Flux (lm)</b>	1230lm
	<b>Lifetime</b>	(L70B50-) 50.000h

## References



	W	$\phi_{LUM}$	K				
<b>483605</b>	6W	583lm	4.000K	Stainless Steel	>70	(L70B50>) 50.000h	Ø130x95,5mm
<b>483612</b>	12W	1230lm	4.000K	Stainless Steel	>70	(L70B50>) 50.000h	Ø180x122mm

## Dimensions

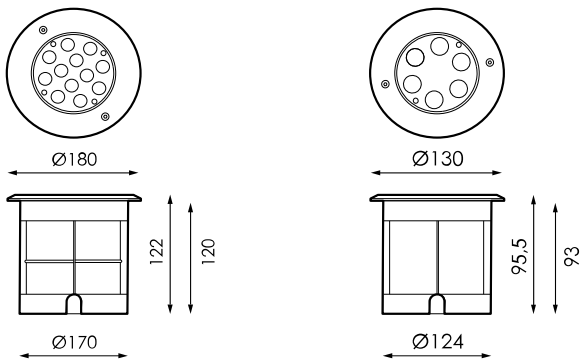

## Photometry

