



---

## Applications

---



Historic buildings



Cultural spaces



Facades






Fairgrounds

## Specifications (Series luminaires)



 <b>Voltage (V)</b>	24 dcV
 <b>Dimming</b>	DMX

 <b>Measures</b>	100x100x108mm
 <b>Weight</b>	0.001056Kg

 <b>IP Tightness index</b>	IP66
--	------

 <b>Operating temperature</b>	-30°C ~ +50°C
--	---------------

 <b>IK Impact resistance</b>	IK06
--	------

 <b>Body color</b>	9004
--	------


 <b>Surges protection</b>	No
--	----

 <b>Diffuser Material</b>	VT
---	----

 <b>Body</b>	AL
--	----

 <b>Flux (lm)</b>	max. 965lm
--	------------

<b>K</b> <b>Colour temperature</b>	RGBW(W:3000)- RGBW(W:3000)
------------------------------------	-------------------------------

 <b>Electrical isolation</b>	CIII
---	------


 <b>CRI Colour rendering index</b>	>RGBW(W:3000)
--	---------------

 <b>Higher Hemispheric Flow</b>	max. 965lm
---	------------

 <b>Lifetime</b>	(L70B50>)50.000h
--	------------------

Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.

## Dimensions





## References



	W	$\phi_{LUM}$	
<b>693851</b>	24W	965lm	Yes

## Photometry

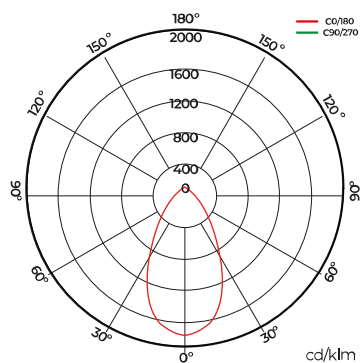



**485135**

MASTER DMX 512 1  
UNIVERSE



**481687**

POWER SUPPLY  
150W 24V IP66 PLUG/  
IP44



**488457**

FUENTE DE  
ALIMENTACION 60W  
24V IP66 CONECTOR



**488464**

POWER SUPPLY  
100W 24V IP66 PLUG/  
IP44



**529037**

MASTER DMX 512 2  
UNIVERSOS



**571968**

FUENTE DE  
ALIMENTACION  
200W 24V IP67



**662932**

ADAPT. 15CM NEGRO  
CONEC. SMART LINK  
A HEMBRA RÁPIDO



**701600**

BLOQUE CONEXION  
T 5P CON  
ADAPTADOR



**705028**

CONECTOR WC  
AUTOBLOCANTE  
MACHO/HEMBRA 2P




**705042**

CONECTOR WC  
AUTOBLOCANTE  
MACHO/HEMBRA 5P




**698221**

ACCESORIO  
"PINCHO"  
PROYECTOR ARTIUM



**708739**

MG 60245 IEC57  
(YZW) 2X1+3X0,3  
CORTE 1 METRO



**715249**

MG-XTREM H07 RN-F  
2X1 450/750V CORTE  
1 METRO