














Specifications (Series luminaires)


	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	Hasta >0,5
	Dimming	No
	Bushing type	E14
	IP Tightness index	IP20
K	Colour temperature	3.000K/5.000K
	CRI Colour rendering index	>80
	Opening angle	240°
	Measures	45x78mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	501lm
	Lifetime	(L70B50>) 15.000h
	CEE Energy classification	F

References



	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
524711	5W	>0,5	493lm	3.000K	45x78mm
524728	5W	>0,5	501lm	4.000K	45x78mm
524735	5W	>0,5	511lm	5.000K	45x78mm

Dimensions

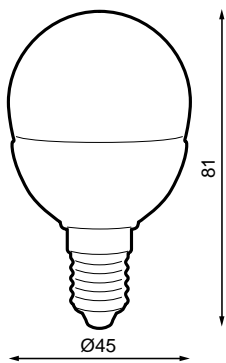

Photometry

