




Applications







Covered car parks





Large surfaces

Specifications (Series luminaires)








	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	max.350mA
ϕ	Power factor (Cos fi)	Hasta 0,94
	LED number	24/48
	Dimming	No

	Measures	1x-660x85x88mm
	Weight	2.6Kg

	Operating temperature	-20~+35°C
---	------------------------------	-----------

ϕ_{LUM}	Flux (lm)	1.581lm
--------------	------------------	---------

	IP Tightness index	IP65
	IK Impact resistance	IK08
	Body color	Light grey
	Diffuser Material	PC-O
	Body	PC


	Electrical isolation	CI
---	-----------------------------	----

	Lifetime	L70B10>50.000h
---	-----------------	----------------

K	Colour temperature	3.000K/5.000K
	CRI Colour rendering index	>80

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions

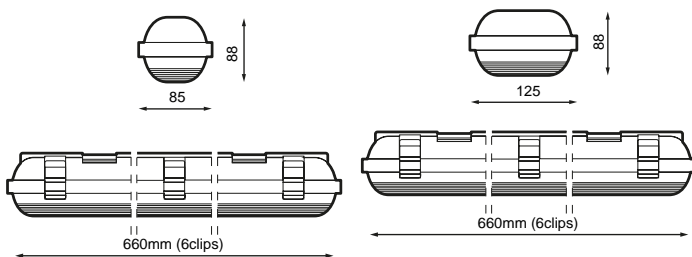



References



	W _{LED}	W		ϕ_{LED}	ϕ_{LUM}		K		
550420	1 x13	15W	350mA	1.6411m	1.4441m	24	3.000K	>80	1x-660x85x88 mm
550437	1 x13	15W	350mA	1.7101m	1.5051m	24	4.000K	>80	1x-660x85x88 mm
550444	1 x13	15W	350mA	1.7951m	1.5811m	24	5.000K	>80	1x-660x85x88 mm
550574	2 x 11	24W	300mA	2.8001m	2.5341m	48	3.000K	>80	2x-660x125x8 8mm
550581	2 x 11	24W	300mA	3.0001m	2.6401m	48	4.000K	>80	2x-660x125x8 8mm
550598	2 x 11	24W	300mA	3.1501m	2.7721m	48	5.000K	>80	2x-660x125x8 8mm

Accessories



-10V



>80 4.000K

378369

SET 6 PLASTIC CLIPS
BERLIN ECO T8
600MM

Technologies



Overstorm

Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

Warning



You need DALI drive



Cora Industry

description

The CORA device in its three versions; INDUSTRY UNIT, INDUSTRY and CORA INDUSTRY MASTER controls the lighting of new or even existing installations thanks to wireless technology such as BLUETOOTH 5.0

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es