











## Specifications (Series luminaires)





	<b>Electrical isolation</b>	CI
	<b>Voltage (V)</b>	230V
<b>Hz</b>	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP65
	<b>Body color</b>	Light grey
	<b>Diffuser Material</b>	PC-T
	<b>Body</b>	PC
	<b>Measures</b>	1.570x88x125mm
	<b>Mounting position</b>	Superficie
	<b>Operating temperature</b>	-5 +35



## References




		
	<b>469845</b>	No
	<b>469876</b>	No
	<b>469906</b>	No
	<b>469937</b>	No

## Dimensions



## Photometry

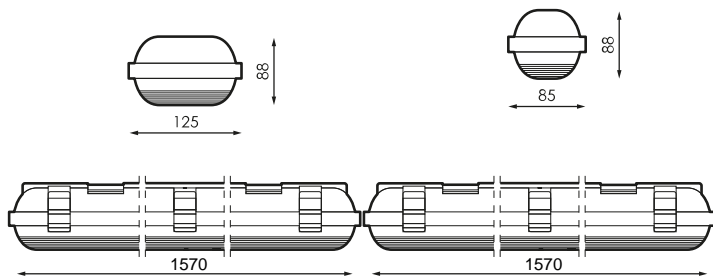

---

## On request

---



Emergency kit 2hBajo el campo de configuración se añade solo este texto, en los 4 idiomas definidos

---

## Accessories

---



---

### 378406

SET OF 10 PLASTIC CLIPS BERLIN ECO T8 1500MM



---

### 146357

SET OF 10 STAINLESS STEEL CLIPS BERLIN ECO T8 1500MM

## Info



Up to -20° with ecTUBE LED PRILUX BASIC and SMART.