




**MADE IN SPAIN**  
Design by PRILUX



## Applications



Industry/Logistics



Covered car parks












Large surfaces







## Certifications



## Specifications (Series luminaires)




	<b>Voltage (V)</b>	220-240V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Current (A)</b>	max.800mA
$\phi$	<b>Power factor (Cos fi)</b>	Hasta 0,98
	<b>LED number</b>	72/360
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP66
	<b>IK Impact resistance</b>	IK10
	<b>Body color</b>	Light grey
	<b>Diffuser Material</b>	PC-O
	<b>Body</b>	PC
K	<b>Colour temperature</b>	4.000K-5.000K
	<b>CRI Colour rendering index</b>	>80

	<b>Measures</b>	1.565x82x87mm
	<b>Weight</b>	2.7Kg
	<b>Mounting</b>	Superficie
	<b>Operating temperature</b>	-20°C
$\phi_{LUM}$	<b>Flux (lm)</b>	16.761lm
	<b>Electrical isolation</b>	CCI
	<b>Lifetime</b>	L90B10>200000h

Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.





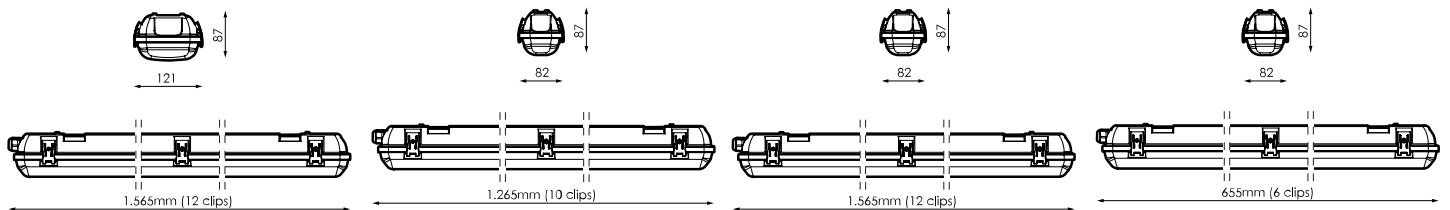
## Dimensions





## References



	$W_{LED}$	W		$\phi_{LED}$	$\phi_{LUM}$	$\phi/W$		K		
<b>524896</b>	1x16	20,1W	500mA	3.128lm	2.674lm	133lm/W	72	4.000K	>80	655x82x87 mm
<b>524926</b>	1x19	22,3W	300mA	3.816lm	3.244lm	145lm/W	144	4.000K	>80	1.265x82x87 mm
<b>524933</b>	1x32	37,2W	500mA	6.095lm	5.181lm	139lm/W	144	4.000K	>80	1.265x82x87 mm
<b>524940</b>	1x45	51,5W	700mA	8.234lm	7.069lm	137lm/W	144	4.000K	>80	1.265x82x87 mm
<b>524957</b>	1x32	36,7W	400mA	6.333lm	5.383lm	147lm/W	180	4.000K	>80	1.565x82x87 mm
<b>524971</b>	1x45	50,4W	550mA	8.386lm	7.128lm	141lm/W	180	4.000K	>80	1.565x82x87 mm
<b>524988</b>	1x45	73,1W	800mA	11.621lm	9.884lm	135lm/W	180	4.000K	>80	1.565x82x87 mm
<b>524995</b>	2x57	123,4W	700mA	20.207lm	16.761lm	136lm/W	360	4.000K	>80	1.565x82x87 mm
<b>525008</b>	2x57	123,4W	700mA	20.467lm	16.977lm	138lm/W	360	5.000K	>80	1.565x82x87 mm
<b>525053</b>	2x24	51W	300mA	9.223lm	7.655lm	150lm/W	360	4.000K	>80	1.565x82x87 mm
<b>525060</b>	2x41	85,2W	300mA	14.873lm	12.270lm	144lm/W	360	4.000K	>80	1.565x82x87 mm
<b>525077</b>	2x53	114,3W	650mA	18.973lm	15.748lm	138lm/W	360	4.000K	>80	1.565x82x87 mm
<b>525114</b>	1x16	20,1W	500mA	3.169lm	2.709lm	135lm/W	72	5.000K	>80	655x82x87 mm
<b>525121</b>	1x19	22,3W	300mA	3.866lm	3.287lm	147lm/W	144	5.000K	>80	1.265x82x87 mm
<b>525138</b>	1x32	37,2W	500mA	6.173lm	5.247lm	141lm/W	144	5.000K	>80	1.265x82x87 mm
<b>525145</b>	1x45	51,5W	700mA	8.339lm	7.159lm	139lm/W	360	5.000K	>80	1.565x82x87 mm
<b>525152</b>	1x32	36,7W	400mA	6.414lm	5.452lm	149lm/W	180	5.000K	>80	1.565x82x87 mm
<b>525169</b>	1x45	50,4W	550mA	8.493lm	7.219lm	143lm/W	180	5.000K	>80	1.565x82x87 mm
<b>525176</b>	1x45	73,1W	800mA	11.802lm	10.038lm	137lm/W	180	5.000K	>80	1.565x82x87 mm
<b>525244</b>	2x24	51W	300mA	9.341lm	7.753lm	152lm/W	360	5.000K	>80	1.565x82x87 mm
<b>525251</b>	2x41	85,2W	500mA	15.064lm	12.428lm	146lm/W	360	5.000K	>80	1.565x82x87 mm
<b>525268</b>	2x53	114,3W	650mA	19.217lm	15.951lm	140lm/W	360	5.000K	>80	1.565x82x87 mm

## On request



Dali

K

>80 4.000K



Cableado Pasante



Presence and brightness sensor (mod.  
1x/2x 1.200mm/1.500mm)