



















## Specifications (Series luminaires)




	<b>Electrical isolation</b>	CII
	<b>Voltage (V)</b>	220-240V
<b>Hz</b>	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP20
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PC
	<b>Body</b>	PC
<b>K</b>	<b>Colour temperature</b>	3.000K-6.500K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	120°
	<b>Measures</b>	175x29,5mm
	<b>Mounting position</b>	Empotrar
	<b>Flux (lm)</b>	1.289lm
	<b>Lifetime</b>	(L70B50-) 25.000h

## References



	W	$\phi_{LUM}$	K					
<b>590501</b>	12W	1.203lm	3.000K	>80	White	150mm	175x29,5mm	No
<b>590518</b>	12W	1.289lm	4.000K	>80	White	150mm	175x29,5mm	No
<b>590525</b>	12W	1.317lm	6.500K	>80	White	150mm	175x29,5mm	No

## Dimensions

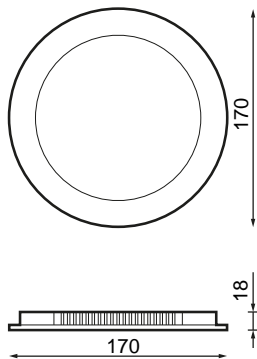

## Photometry



## Info



PCB Module made in aluminium in order to make easily the dissipation of temperature . Internal polycarbonate board to improve the light reflection. Perimetral light.



---

## Accessories

---



---

**590570**

---

BRENO BASIC  
ACCESSORY 12W  
SURFACE 175X32MM  
WHITE