




Specifications (Series luminaires)

	Electrical isolation	CII
	Voltage (V)	230V
	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	Hasta >0,9
	Dimming	No

	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PS
	Body	AL

	Colour temperature	3000K-4000K-6500K
	CRI Colour rendering index	>80
	Opening angle	120°

	Measures	147x147x10mm
	Mounting position	Empotrado Techo

	Operating temperature	-5°C ~ +35°C
---	-----------------------	--------------

	Flux (lm)	max. 2450lm
---	-----------	-------------


	Lifetime	(L70B50>)35.000h
---	----------	------------------

References



	W	ϕ_{LUM}	K					
671521	6W	510lm	3000K 4000K 6500K	80	White	108mm	90x90x18mm	No
671538	9W	765lm	3000K 4000K 6500K	80	White	131mm	147x147x10mm	No
671545	12W	1200lm	3000K 4000K 6500K	80	White	155mm	168x168x15mm	No
671552	18W	1820lm	3000K 4000K 6500K	80	White	205mm	220x220x15mm	No
671569	24W	2450lm	3000K 4000K 6500K	80	White	280mm	0x0x0mm	No
671613	18W	1820lm	3000K 4000K 6500K	80	White	NO	224x224x32mm	No
671620	24W	2450lm	3000K 4000K 6500K	80	White	-	302x302x32mm	No
671651	6W	510lm	3000K 4000K 6500K	80		108mm	90x90x18mm	No
671668	9W	765lm	3000K 4000K 6500K	80		131mm	0x0x0mm	No
671675	12W	1200lm	3000K 4000K 6500K	80		155mm	168x168x15mm	No
671682	18W	1820lm	3000K 4000K 6500K	80		205mm	237x237x25mm	No
671699	24W	2450lm	3000K 4000K 6500K	80			0x0x0mm	No
671743	18W	1820lm	3000K 4000K 6500K	80		-	0x0x0mm	No
671750	24W	2450lm	3000K 4000K 6500K	80		-	0x0x0mm	No

Dimensions

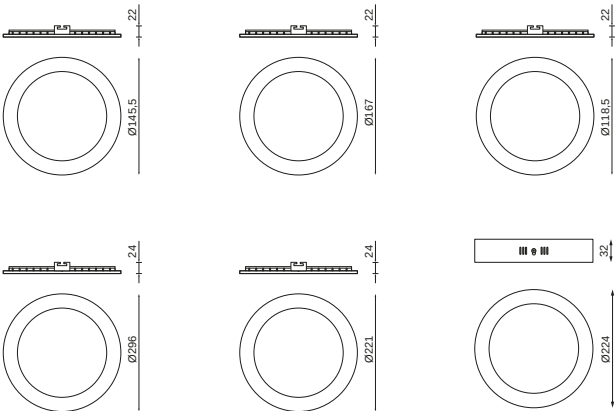

Photometry

