



















Specifications (Series luminaires)

	Electrical isolation	CII
	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	Hasta $\geq 0,9$
	Dimming	No
	IP Tightness index	IP20
	IP installed Sealing rating	40
	Body color	9006
	Diffuser Material	PC-O
	Body	PC
K	Colour temperature	6500k/6500k
	CRI Colour rendering index	≥ 80
	Opening angle	120°
	Measures	Ø230x10mm
	Mounting position	Empotrado Techo
	Operating temperature	-5 +35
	Flux (lm)	1639lm
	Lifetime	(L70B50>) 25.000h




References




	W	ϕ_{LUM}	K					
553605	18W	1578lm	3.000K	≥ 80	White	$\varnothing 205$	$\varnothing 230 \times 10 \text{mm}$	No
553612	18W	1639lm	4.000K	≥ 80	White	$\varnothing 205$	$\varnothing 230 \times 10 \text{mm}$	No
553629	18W	1720lm	6500k	≥ 80	White	$\varnothing 205$	$\varnothing 230 \times 10 \text{mm}$	No
553636	18W	1578lm	3.000K	≥ 80	Grey 9006	$\varnothing 205$	$\varnothing 230 \times 10 \text{mm}$	No
553643	18W	1639lm	4.000K	≥ 80	Grey 9006	$\varnothing 205$	$\varnothing 230 \times 10 \text{mm}$	No

Dimensions

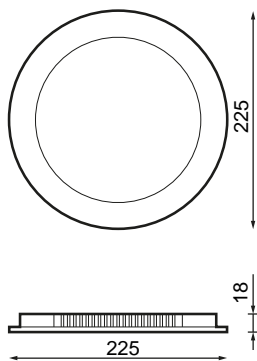


Photometry

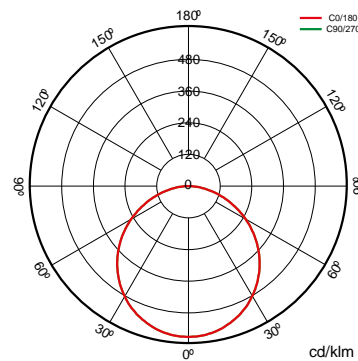



Accessories



553674

SURFACE
ACCESSORY BRENO
PC 18W GR 9006