



















Specifications (Series luminaires)



	Electrical isolation	CII
	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	Hasta $\geq 0,9$
	Dimming	No
	IP Tightness index	IP20
	IP installed Sealing rating	40
	Body color	White
	Diffuser Material	PC-O
	Body	AL
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	≥ 80
	Opening angle	120°
	Measures	120x120x18mm
	Mounting position	Empotrado Techo
	Operating temperature	-5 +35
	Flux (lm)	511lm
	Lifetime	(L70B50>) 35.000h

References




	W	ϕ_{LUM}	K					
483070	9W	511lm	3.000K	≥ 80	White	105x105	120x120x18mm	No
483087	9W	544lm	4.000K	≥ 80	White	105x105	120x120x18mm	No
483094	9W	511lm	3.000K	≥ 80	Grey 9006	105x105	120x120x18mm	No
483100	9W	544lm	4.000K	≥ 80	Grey 9006	105x105	120x120x18mm	No

Dimensions



Photometry

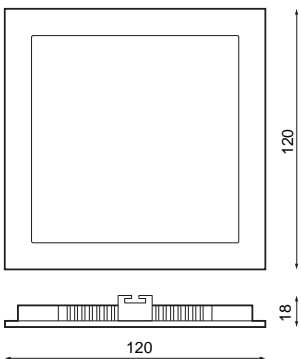

Info



PCB Module made in aluminium in order to make easily the dissipation of temperature . Internal polycarbonate board to improve the light reflection. Perimetral light.

On request



Emergency kit 1h (Except 24W)



Regulation 1-10V



Solutions

S



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



CLASSROOMS Pack

description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



BLUETOOTH Pack

description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.



You need

description



Need DALI driver

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es