












Specifications (Series luminaires)


	Electrical isolation	CII
	Voltage (V)	220-240V
	Opening angle	36°
	Measures	Ø80x250x223mm
	Flux (lm)	3.128lm
	Lifetime	30.000h
	Lifetime	(L70B50>)30.000h

References




	W	ϕ_{LUM}	
580182	27W	3.059lm	Ø80x250x223mm
580199	27W	3.128lm	Ø80x250x223mm
580205	27W	3.059lm	Ø80x250x223mm
580212	27W	3.128lm	Ø80x250x223mm

Dimensions

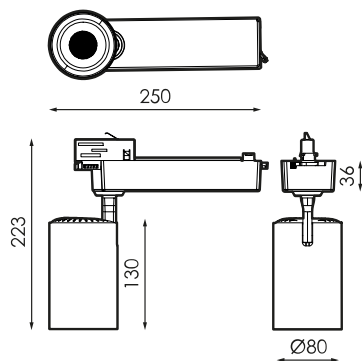

Photometry

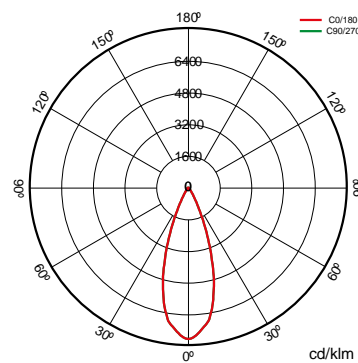



Accessories



484633

CHIO 30W BL OVAL
SNOOT ACCESSORY



484572

CHIO LENS 24° 30W



Info



Three-phase electrified rail and accessories in white, black and grey. Adapter for three phase track 250V 6A.