













Specifications (Series luminaires)


	Electrical isolation	CCII
	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	IP Tightness index	IP20
	Diffuser Material	PC
	Body	AL iap
	Measures	250x223xØ80mm
	Operating temperature	(-30°C,+35°C)
	Flux (lm)	3059lm
	Lifetime	>50.000h
	Lifetime	(L70B50>)30.000h

References



	W	ϕ_{LUM}	
627856	30W	3059lm	250x223x ϕ 80mm
627863	30W	3128lm	250x223x ϕ 80mm
627887	30W	3059lm	250x223x ϕ 80mm
627894	30W	3128lm	250x223x ϕ 80mm

Dimensions

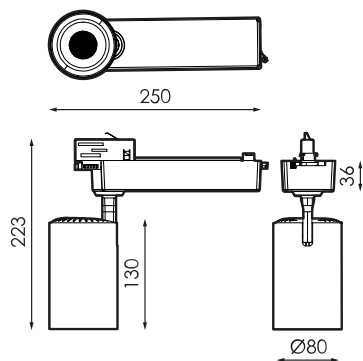

Photometry



Accessories



484633

CHIO 30W BL OVAL
SNOOT ACCESSORY



484572

CHIO LENS 24° 30W