



---

**Applications** 









---









Large surfaces

## Specifications (Series luminaires)




	<b>Voltage (V)</b>	230V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
$\phi$	<b>Power factor (Cos fi)</b>	Hasta 0.9
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP65
	<b>IK Impact resistance</b>	IK07
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PC-O
	<b>Body</b>	PC
K	<b>Colour temperature</b>	4.000K/6.500K
	<b>CRI Colour rendering index</b>	>80

	<b>Measures</b>	1.200x84x71mm
	<b>Weight</b>	1.32Kg
	<b>Operating temperature</b>	-10°C~+35 °C
	<b>Flux (lm)</b>	4.418lm
	<b>Electrical isolation</b>	CII
	<b>Lifetime</b>	(L70B50>) 30.000h

Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.

## Dimensions

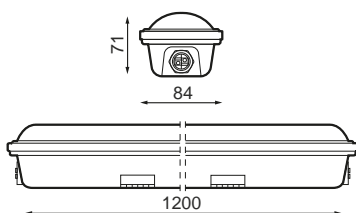


## References



	$W_{LED}$	W	$\phi_{LED}$	$\phi_{LUM}$	K		
<b>534512</b>	40W	37W	5.4211m	4.4181m	4.000K	>80	1.200x84x71mm
<b>534529</b>	40W	37W	5.6371m	4.6231m	6.500K	>80	1.200x84x71mm

## Photometry

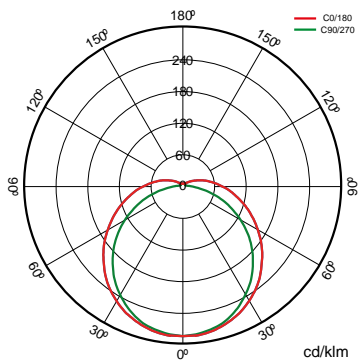



## Info



Not suitable for your exposure to uva rays.



## Info



Quick connector. Fastening clip. Serial connection: 18W:  
32luminaires 37W: 20luminaires 57W: 13luminaires