












Applications









Large surfaces

Specifications (Series luminaires)




	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
ϕ	Power factor (Cos fi)	Hasta 0.9
	Dimming	No
	IP Tightness index	IP65
	IK Impact resistance	IK07
	Body color	White
	Diffuser Material	PC-O
	Body	PC
K	Colour temperature	4.000K/6.500K
	CRI Colour rendering index	>80

	Measures	600x84x71mm
	Weight	0.7Kg
	Operating temperature	-10°C~+35 °C
	Flux (lm)	2.414lm
	Electrical isolation	CII
	Lifetime	(L70B50>) 30.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions

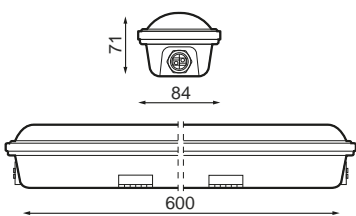


References



	W_{LED}	W	ϕ_{LED}	ϕ_{LUM}	K		
534499	20W	18W	2.943lm	2.414lm	4.000K	>80	600x84x71mm
534505	20W	18W	3.090lm	2.533lm	6.500K	>80	600x84x71mm

Photometry

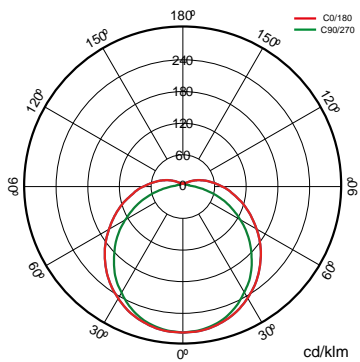



Info



Not suitable for your exposure to uva rays.



Info



Quick connector. Fastening clip. Serial connection: 18W: 32luminaires 37W: 20luminaires 57W: 13luminaires