





Applications



Offices



Classrooms



Retail



Home



Large surfaces



Hotels











Restaurants









Health care

Specifications (Series luminaires)




	Voltage (V)	230V
Hz	Frecuency (Hz)	50Hz
ϕ	Power factor (Cos fi)	Hasta $\geq 0,9$
	Dimming	No
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC-T
	Body	PC
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	≥ 80
	UGR	<19

	Measures	$\varnothing 250 \times 33 \text{mm}$
	Mounting position	Superficie
	Operating temperature	-5 +35
	Flux (lm)	1389lm
	Electrical isolation	CII
	Lifetime	(L70B50>) 50.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

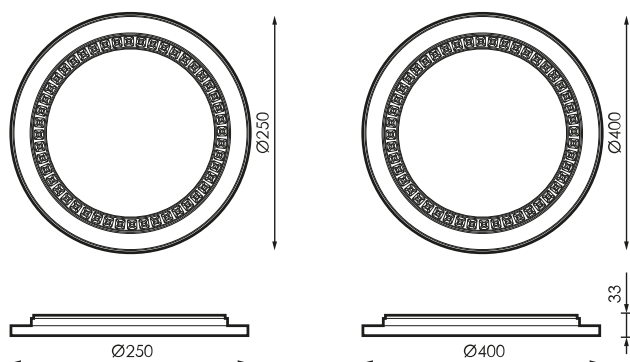

Dimensions





References



	W_{LED}	W	ϕ	ϕ_{LED}	ϕ_{LUM}	K	
446471	10W	12W	$\geq 0,9$	1616lm	1389lm	4.000K	No
446488	10W	12W	$\geq 0,9$	1397lm	1215lm	3.000K	No
446495	22W	25W	$\geq 0,9$	3523lm	2998lm	4.000K	No
446501	22W	25W	$\geq 0,9$	3362lm	2783lm	3.000K	No