





Applications



Offices



Classrooms



Retail




Home



Large surfaces



Hotels











Restaurants









Health care

Specifications (Series luminaires)




	Voltage (V)	230V
Hz	Frecuency (Hz)	50Hz
ϕ	Power factor (Cos fi)	Hasta $\geq 0,9$
	Dimming	No
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC-T
	Body	PC
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	≥ 80
	UGR	<19

	Measures	400x400x33mm
	Mounting position	Superficie
	Operating temperature	-5 +35
	Flux (lm)	2852lm
	Electrical isolation	CII
	Lifetime	(L70B50>) 50.000h



Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

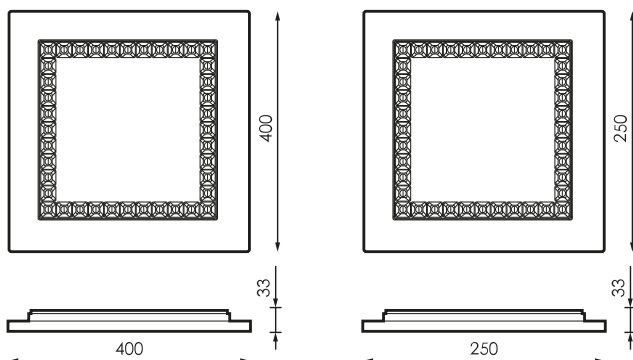Dimensions



References



	W_{LED}	W	ϕ	ϕ_{LED}	ϕ_{LUM}	K	
446518	10W	12W	$\geq 0,9$	1663lm	1464lm	4.000K	No
446525	10W	12W	$\geq 0,9$	1564lm	1376lm	3.000K	No
446532	22W	25W	$\geq 0,9$	3216lm	2852lm	4.000K	No
446549	22W	25W	$\geq 0,9$	3035lm	2674lm	3.000K	No

Photometry

