














Specifications (Series luminaires)



	Electrical isolation	CIII
	Voltage (V)	V
	Dimming	No
	IP Tightness index	IP65
	Body color	Canvas grey
	Diffuser Material	PC
	Body	ABS
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	>80
	Measures	492,5x231,9x58mm
	Flux (lm)	1.916lm
	Lifetime	(L70B50>) 35.000h



References





	W	ϕ_{LUM}	K				
590624	15W	1.801lm	3.000K	Canvas gray	>80	(L70B50>) 35.000h	492,5x231,9x58m
590631	15W	1.916lm	4.000K	Canvas gray	>80	(L70B50>) 35.000h	492,5x231,9x58m

Dimensions



Photometry

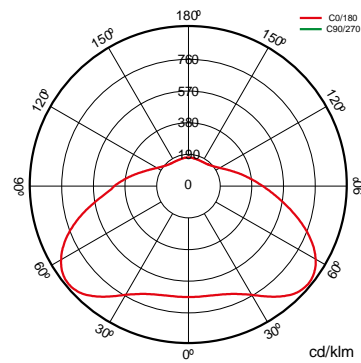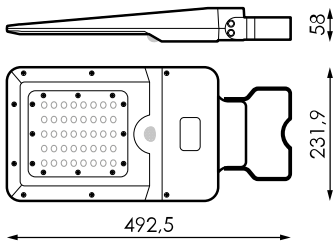

Accessories



590686

40-60MM POST
MOUNTING DRACO
ACCESSORY

590648

DRACO ACCESSORY
FOR MOUNTING
STAFF DIAM
40-50MM



Info



Replaceable battery