
























Specifications (Series luminaires)

	Electrical isolation	CIII
	Voltage (V)	V
	Dimming	Yes
	IP Tightness index	IP65
	IK Impact resistance	IK07
	Body color	Black
	Diffuser Material	PC
	Body	ABS + PC + METAL, ANTI UV
K	Colour temperature	3000K-4000K-5000K
	CRI Colour rendering index	>80
	Opening angle	140X70°
	Measures	706x299x74mm
	Mounting position	MONTAJE EN BACULO, Surface Wall, MONTAJE EN POSTE
	Operating temperature	-20°C ~ +50°C
	Flux (lm)	max. 6108lm
	Lifetime	(L70B50>)35.000h


References


	W	ϕ_{LUM}	K					
704687	20W	3000lm	3000K 4000K 5000K	Black	>80	(L70B50>)35.000h	140X70°	706x290x74mm
706032	40W	5965lm 6003lm 6108lm	3000K 4000K 5000K	Black	>80	(L70B50>)35.000h	140X70°	706x299x74mm

Dimensions



Photometry

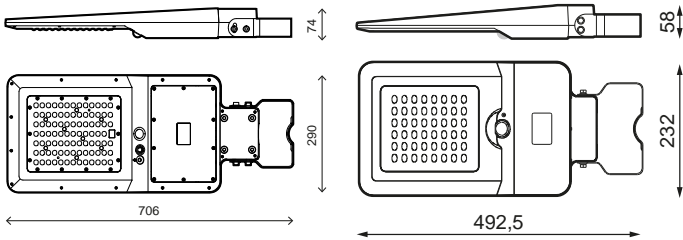



590686

ACCESORIO DRACO
MONTAJE POSTE
40-60MM



590648

ACCESORIO DRACO
MONTAJE BACULO
Ø40-50MM