














## Specifications (Series luminaires)

	<b>Voltage (V)</b>	100-240V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Dimming</b>	No
	<b>Bushing type</b>	E40
	<b>IP Tightness index</b>	IP20
K	<b>Colour temperature</b>	3.000K/6.500K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	290°
	<b>Measures</b>	106x317mm
	<b>Flux (lm)</b>	5.345lm
	<b>Lifetime</b>	(L70B50>) 25.000h
	<b>CEE Energy classification</b>	F

## References

	W	$\phi_{LUM}$	K	$\leftrightarrow$
<b>385602</b>	55W	6.144lm	4.000K	106x303mm
<b>385619</b>	55W	6.334lm	6.500K	106x303mm
<b>475747</b>	55W	5.345lm	3.000K	106x303mm
<b>475754</b>	55W	5.345lm	3.000K	106x317mm

## Dimensions

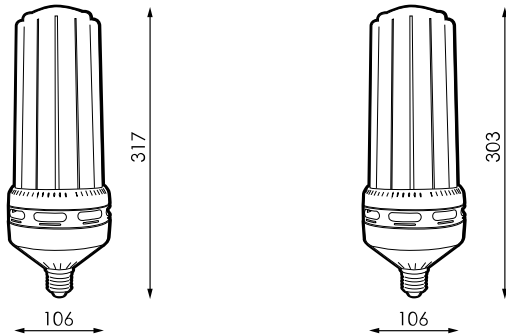

## Photometry

### Info

The working ambient temperature can not exceed 50°C in any case, therefore, it is not advisable to use these bulbs in closed luminaires where these temperatures can be overcome, since the useful life of the product can be significantly reduced. Lack of ventilation or sufficient air volume raises the temperature above the limits of product use.