















## Specifications (Series luminaires)


|   |                                   |                    |
|---|-----------------------------------|--------------------|
|    | <b>Voltage (V)</b>                | 230V               |
| Hz  | <b>Frecuency (Hz)</b>             | 50-60Hz            |
| $\Phi$  | <b>Power factor (Cos fi)</b>      | Hasta >0,9         |
|    | <b>Dimming</b>                    | No                 |
|    | <b>Bushing type</b>               | G13 (No rotatorio) |
|    | <b>Diffuser Material</b>          | VT-O               |
| K   | <b>Colour temperature</b>         | 4.000K/6.500K      |
|    | <b>CRI Colour rendering index</b> | >80                |
|    | <b>Opening angle</b>              | 250°               |
|  | <b>Measures</b>                   | 28x604mm           |
|  | <b>Operating temperature</b>      | -5°C~+45 °C        |
| $\Phi_{LUM}$  | <b>Flux (lm)</b>                  | 967lm              |
|  | <b>Lifetime</b>                   | (L70B50>) 30.000h  |
|  | <b>N° of ignitions</b>            | 200.000            |
|  | <b>CEE Energy classification</b>  | F                  |

## References



|  | W   | $\phi_{LUM}$ | K      | $\leftrightarrow$ |
|---|-----|--------------|--------|-------------------|
| <b>482240</b>   | 9W  | 928lm        | 4.000K | 28x604mm          |
| <b>482257</b>   | 9W  | 967lm        | 6.500K | 28x604mm          |
| <b>482264</b>   | 18W | 1.789lm      | 4.000K | 28x1.213mm        |
| <b>482271</b>   | 18W | 1.837lm      | 6.500K | 28x1.213mm        |
| <b>482288</b>   | 24W | 2.435lm      | 4.000K | 28x1.514mm        |
| <b>482295</b>   | 24W | 2.491lm      | 6.500K | 28x1.514mm        |

## Dimensions

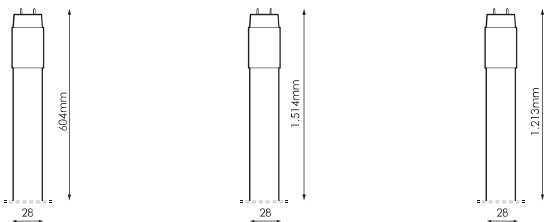

## Photometry

