














Specifications (Series luminaires)


	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	Hasta >0,5
	Dimming	No
	Bushing type	G13 (No rotatorio)
	Diffuser Material	VT-O
K	Colour temperature	4.000K/6.500K
	CRI Colour rendering index	>80
	Opening angle	180°
	Measures	28x1.213mm
	Operating temperature	-20°C~+40 °C
Φ_{LUM}	Flux (lm)	1.958lm
	Lifetime	(L70B50>) 15.000h
	N° of ignitions	7.500
	CEE Energy classification	F

References



	W	ϕ_{LUM}	K	\leftrightarrow
560672	9W	1.013lm	4.000K	28x604mm
560689	9W	1.013lm	6.500K	28x604mm
560696	18W	1.958lm	4.000K	28x1.213mm
560702	18W	1.958lm	6.500K	28x1.213mm
560719	22W	2.463lm	4.000K	28x1.514mm
560726	22W	2.463lm	6.500K	28x1.514mm

Dimensions

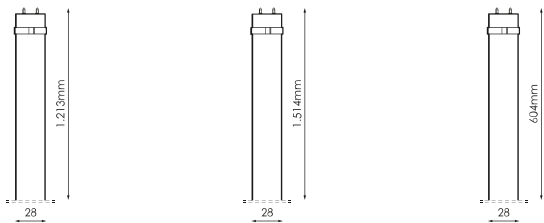

Photometry

