















Specifications (Series luminaires)


	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	Hasta >0,9
	Dimming	No
	Bushing type	G13 Rotatorio
	Diffuser Material	VT-O PET
K	Colour temperature	4.000K/6.500K
	CRI Colour rendering index	>80
	Opening angle	180°
	Measures	28x603mm
	Operating temperature	-10°C~+45 °C
Φ_{LUM}	Flux (lm)	1.118lm
	Lifetime	(L70B50>) 50.000h
	N° of ignitions	200.000
	CEE Energy classification	D

References



	W	ϕ_{LUM}	K	\leftrightarrow
458146	8W	1.096lm	4.000K	28x603mm
458153	8W	1.118lm	6.500K	28x603mm
458160	16W	2.272lm	4.000K	28x1.213mm
458177	16W	2.324lm	6.500K	28x1.213mm
458184	22W	3.078lm	4.000K	28x1.513mm
458191	22W	3.112lm	6.500K	28x1.513mm

Dimensions

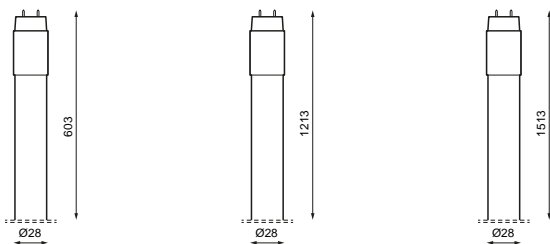

Photometry

