




















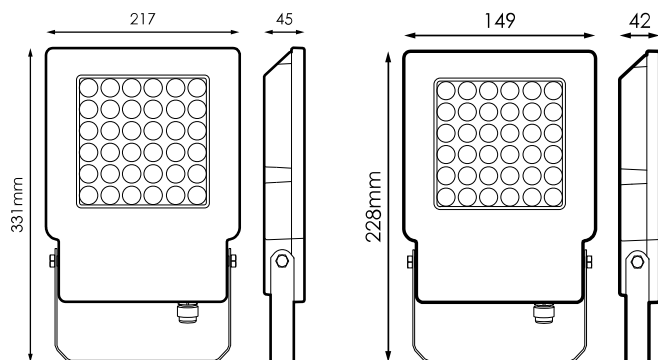
Specifications (Series luminaires)

	Electrical isolation	CI
	Voltage (V)	100-240V
	Frecuency (Hz)	50-60Hz
	IP Tightness index	IP65
	IK Impact resistance	IK08
	Body color	Canvas grey
	Diffuser Material	VT-T
	Body	AL
	Colour temperature	RGB/RGB
	CRI Colour rendering index	>70
	Opening angle	90°
	Measures	331x217x45mm
	Operating temperature	-5°C~+35 °C
	Lifetime	(L70B50>) 25.000h

References

	W	K		
497602	20W	RGB	Canvas gray	265x172x45mm
497619	50W	RGB	Canvas gray	331x217x45mm

Dimensions



Photometry