













Specifications (Series luminaires)




	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	Hasta >0,5
	Dimming	No
	Bushing type	E14
	IP Tightness index	IP20
K	Colour temperature	3.000K/3.000K
	CRI Colour rendering index	>80
	Opening angle	180°
	Measures	37x107mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	524lm
	Lifetime	(L70B50>) 25.000h
	CEE Energy classification	A++

References

	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
392761	5W	>0,5	524lm	3.000K	37x107mm

Dimensions

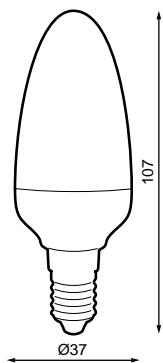

Photometry

Info

Until end of stock